


# MK9 Pendant/watch Programming Guide

**1**


The MK9 pendant and watch have a hidden button located above the red button. They also have a clear programming window.

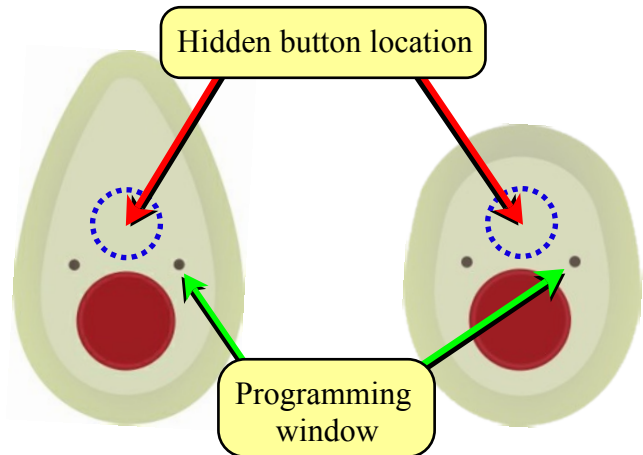

**2**

The MK9 Alarm dialler has a very bright **RED** pendant/watch programming light on the front that flashes briefly when the alarm is first switched on.


Programming light

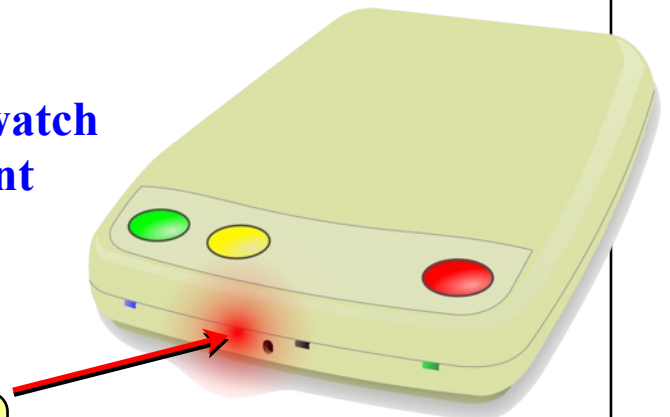

**3**

To program a pendant or watch, the programming light on the alarm needs to flash **DIRECTLY** into the programming window of the pendant or watch.


**TIP:** Any number of pendants or watches can be programmed for the same alarm using the method in this guide

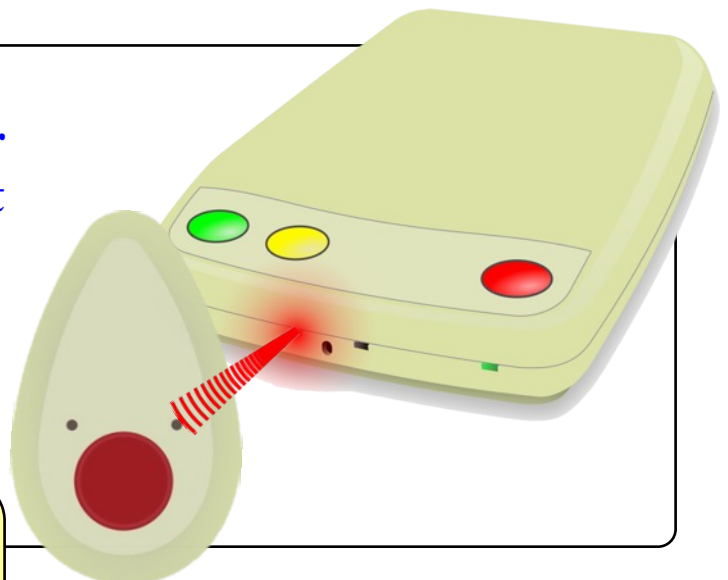

**4**

To prepare the pendant or watch for programming, hold down **BOTH** pendant buttons **TOGETHER** until the activation light begins

Flashing activation light

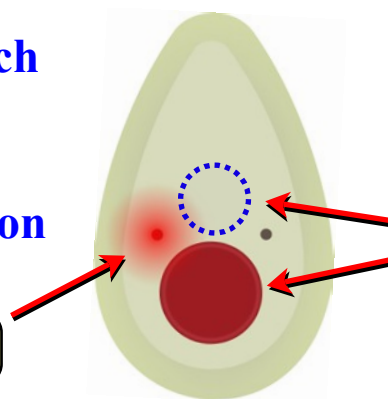


Hold down **BOTH** buttons

Hold the pendant or watch less than 10mm away from the alarm and align the programming window with the programming light. Now switch on the alarm to begin programming.

Keep distance less than 10mm

**5**

The pendant or watch will be programmed in a few seconds. Check the pendant operates the alarm and if successful you can press **CANCEL** to stop the call. If the programming was unsuccessful, restart from step 4.

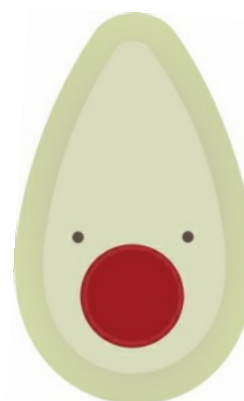**6**

**NOTE:** The pendant or watch will stay in programming mode for 30 seconds after completing step 4. The pendant/watch activation light will stop flashing when it is no longer in programming mode. You may have to wait for the pendant/watch activation light to stop flashing before restarting from step 4.